




PNEUMATIC PUMP SETS DOP 300

3D drawings are available on vuototecnica.net

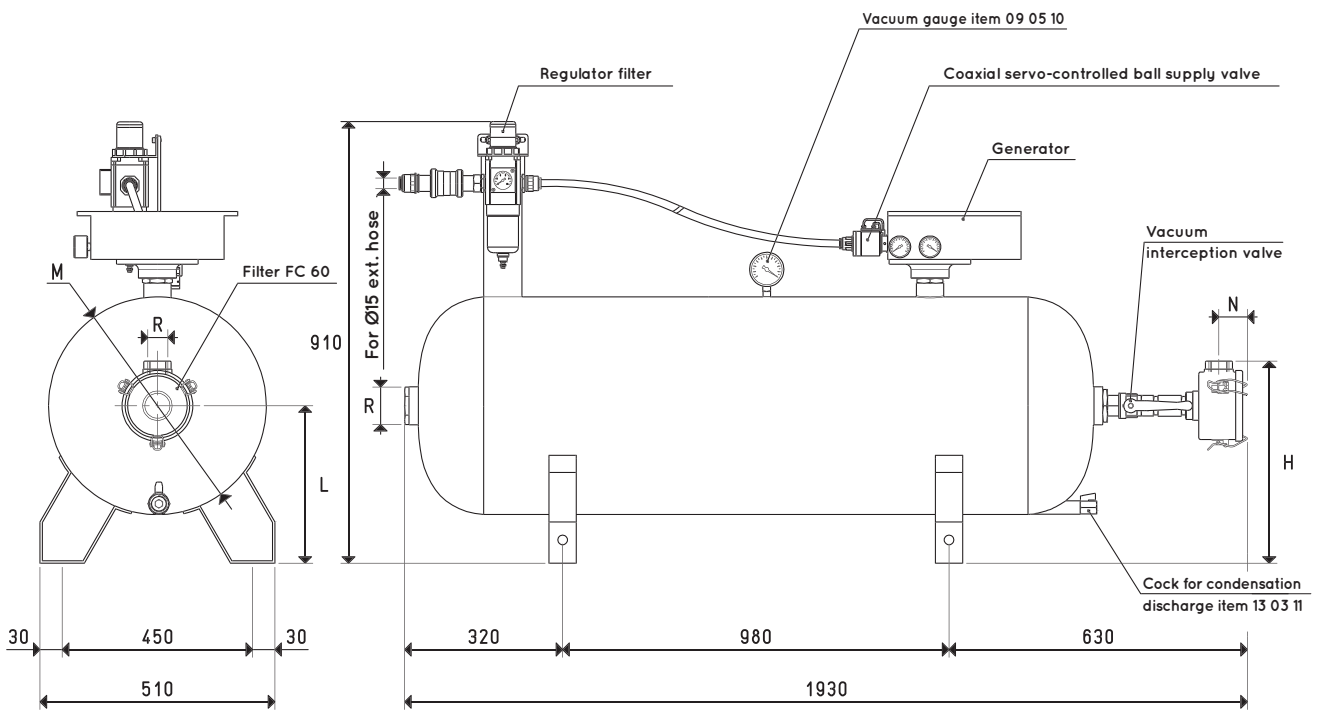

Item	Tank	Generator	Pneumatic switchgear	H	L	M	N	R	Weight
	Litres	item	item			Ø		Ø	Kg
DOP 300 PVP 300 MD	300	PVP 300 MDR ES	DOP 150 90	440	340	500	45	G2"	41.2

Note: Vacuum generator supply must be carried out with non-lubricated compressed air, 5 micron filtration, in accordance with standard ISO 8573-1 class 4.

Transformation ratio: N (newton) = Kg x 9.81 (force of gravity)

inch = $\frac{\text{mm}}{25.4}$; pounds = $\frac{\text{g}}{453.6} = \frac{\text{Kg}}{0.4536}$

Adapters for GAS - NPT threading available on page 1.130