




# MULTI-STAGE VACUUM GENERATORS PVP 25 MX / MXLP

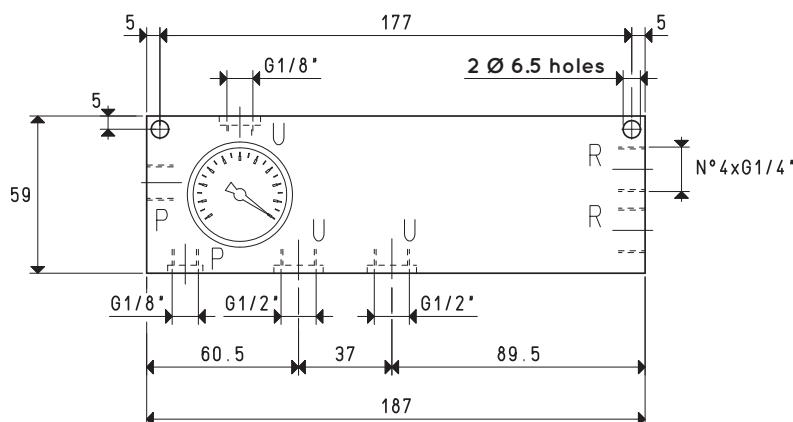

3D drawings are available on [vuototecnica.net](http://vuototecnica.net)

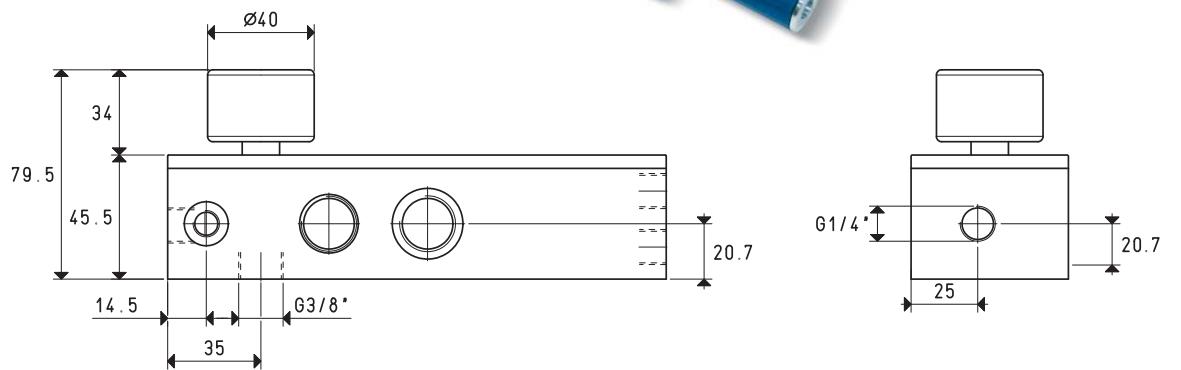

P=COMPRESSED AIR CONNECTION      R=EXHAUST      U=VACUUM CONNECTION

Item		PVP 25 MX			PVP 25 MXLP		
<b>Intake air flow rate</b>	m <sup>3</sup> /h	25.0	28.0	31.0	19.0	27.5	34.0
<b>Maximum level of vacuum</b>	-KPa	65	85	90	30	61	86
<b>Final pressure</b>	abs. mbar	350	150	100	700	390	140
<b>Supply pressure</b>	bar	4	5	6	1	2	3
<b>Optimal supply pressure</b>	bar			6			3
<b>Air consumption</b>	Nl/s	2.1	2.6	3.0	2.2	3.2	4.5
<b>Temperature of use</b>	°C			-20 / +100			-20 / +100
<b>Noise level at optimal supply pressure</b>	dB(A)			70			70
<b>Weight</b>	g			960			960

## Spare parts

## PVP 25 MX / MXLP

<b>Sealing kit and reed valves</b>	item	00 KIT PVP 25 MX
<b>Sound absorption material for exhaust</b>	item	00 15 534
<b>Vacuum gauge</b>	item	09 03 15

Note: All vacuum values indicated in the table are valid at the normal atmospheric pressure of 1013 mbar and obtained with a constant supply pressure.

Vacuum generator supply must be carried out with non-lubricated compressed air, 5 micron filtration, in accordance with standard ISO 8573-1 class 4.

Transformation ratio: N (newton) = Kg x 9.81 (force of gravity)

$$\text{inch} = \frac{\text{mm}}{25.4}; \text{ pounds} = \frac{\text{g}}{453.6} = \frac{\text{Kg}}{0.4536}$$


Adapters for GAS - NPT threading available on page 1.130



# MULTI-STAGE VACUUM GENERATORS PVP 25 MX / MXLP


3D drawings are available on [vuototecnica.net](http://vuototecnica.net)

Air flow rate (NI/s) at different levels of vacuums (-KPa) at optimal supply pressure

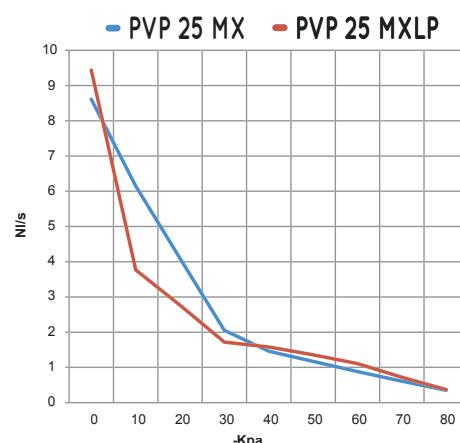

Generator item	Supp. press. bar	Air consumption NI/s	Air flow rate (NI/s) at different levels of vacuums (-KPa) at optimal supply pressure								Max vacuum -KPa	
			0	10	20	30	40	50	60	70		
PVP 25 MX	6.0	3.0	8.61	6.15	4.10	2.05	1.46	1.17	0.88	0.61	0.35	90
PVP 25 MXLP	3.0	4.5	9.44	3.77	2.77	1.72	1.58	1.36	1.11	0.72	0.37	86

Evacuation rates (ms/l = s/m³) at different levels of vacuums (-KPa) at optimal supply pressure

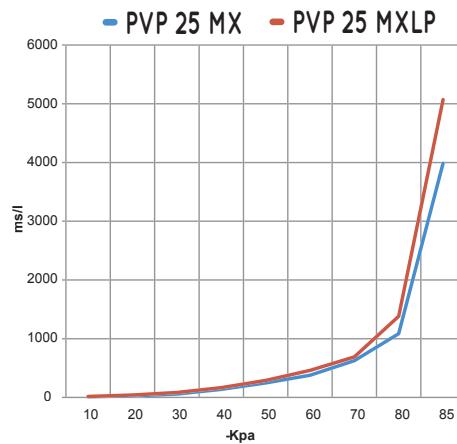

Generator item	Supp. press. bar	Air consumption NI/s	Evacuation rates (ms/l = s/m³) at different levels of vacuums (-KPa) at optimal supply pressure								Max vacuum -KPa	
			10	20	30	40	50	60	70	80		
PVP 25 MX	6.0	3.0	10	26	57	137	246	377	626	1083	3986	90
PVP 25 MXLP	3.0	4.5	16	41	83	165	290	460	690	1380	5070	86

## ACCESSORIES UPON REQUEST

4 silencers item SSX 1/4"

