



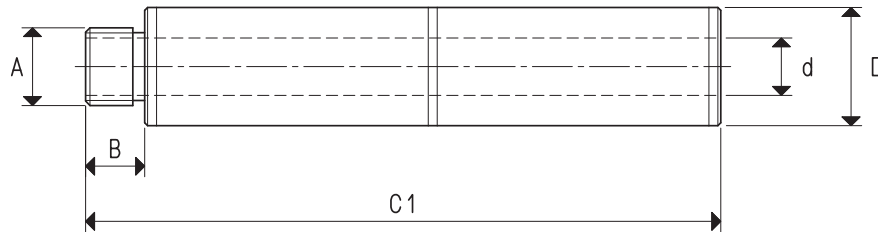

# SILENCERS

The use of natural fibre sound absorbing material enclosed in special anodised aluminium casings has allowed creating this new range of silencers that considerably reduce noise made by air at the vacuum generator exhaust. There are two versions with different lengths: the longer the length, the more noise will be reduced. Noise reduction: from -13 to -20 dB (A) Working temperature: from -20 to +100°C

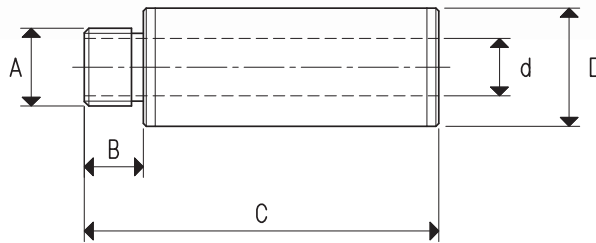

Item	A Ø	B	C	C1	D Ø	d Ø	Weight g
SSX 1/8"	G1/8"	10	58	--	17	7	14
SSX 1/4"	G1/4"	10	60	--	20	10	20
SSX 3/8" R	G3/8"	7	57	--	20	10	17
SSX 3/8"	G3/8"	12	84	--	29	16	52
SSX 1/2"	G1/2"	14	106	--	35	16	96
SSX 3/4" R	G3/4"	14	106	--	35	16	100
SSX 3/4"	G3/4"	14	126	--	50	21	174
SSX 1"	G1"	14	146	--	55	28	240
SSX 1" 1/2	G1" 1/2	30	210	--	80	38	302
SSX 2"	G2"	30	250	--	90	48	372
2SSX 1/8"	G1/8"	10	--	104	17	7	28
2SSX 1/4"	G1/4"	10	--	108	20	10	40
2SSX 3/8"	G3/8"	12	--	154	29	16	104
2SSX 1/2"	G1/2"	14	--	196	35	16	192
2SSX 3/4"	G3/4"	14	--	236	50	21	348
2SSX 1"	G1"	14	--	276	55	28	480

Transformation ratio: N (newton) = Kg x 9.81 (force of gravity)

$$\text{inch} = \frac{\text{mm}}{25.4}; \text{pounds} = \frac{\text{g}}{453.6} = \frac{\text{Kg}}{0.4536}$$

Adapters for GAS - NPT threading available on page 1.130