






SERVO-CONTROLLED 3-WAY VACUUM SOLENOID VALVES, FOR LARGE FLOW RATES


3D drawings are available on vuototecnica.net



4

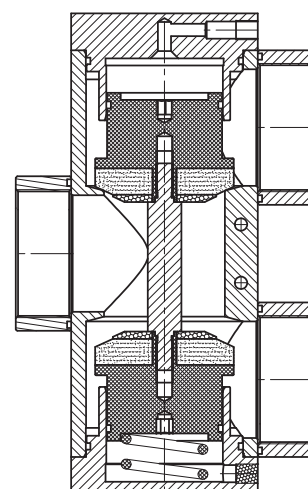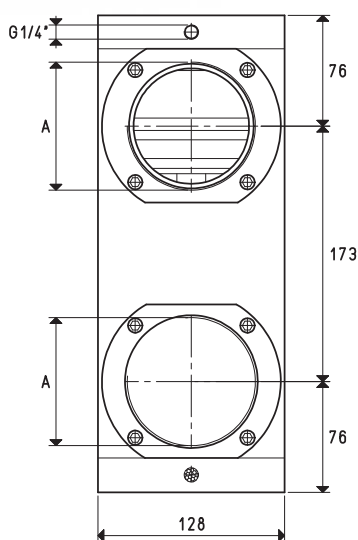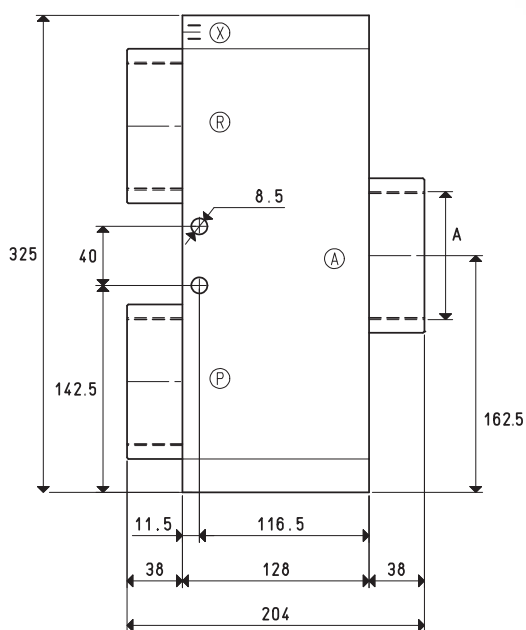


NC



X = Compressed air supply
P = Pump
A = Use
R = Discharge

NO



X = Compressed air supply
P = Discharge
A = Use
R = Pump

Item	A	Max flow rate	Level of vacuum		Reaction time		Mouth	Cross-section of passage	Pressure at servo-controlled	Weight
	Ø	m³/h	abs. mbar	min max	msec	energ. de-energ.	Ø	mm²	bar	Kg
07 09 31	G3"	750	1000	0.5	132	84	80	5024	4 ÷ 8	11.4

Note: Valve servo-controlled power must be supplied with non-lubricated compressed air, 5 micron filtration, according to standard ISO 8573-1 class 4.

Transformation ratio: N (newton) = Kg x 9.81 (force of gravity)

inch = $\frac{\text{mm}}{25.4}$; pounds = $\frac{\text{g}}{453.6} = \frac{\text{Kg}}{0.4536}$

Adapters for GAS - NPT threading available on page 1.130