




SERVO-CONTROLLED 3-WAY VACUUM SOLENOID VALVES WITH TWO ELECTRIC COILS, FOR LARGE CAPACITIES

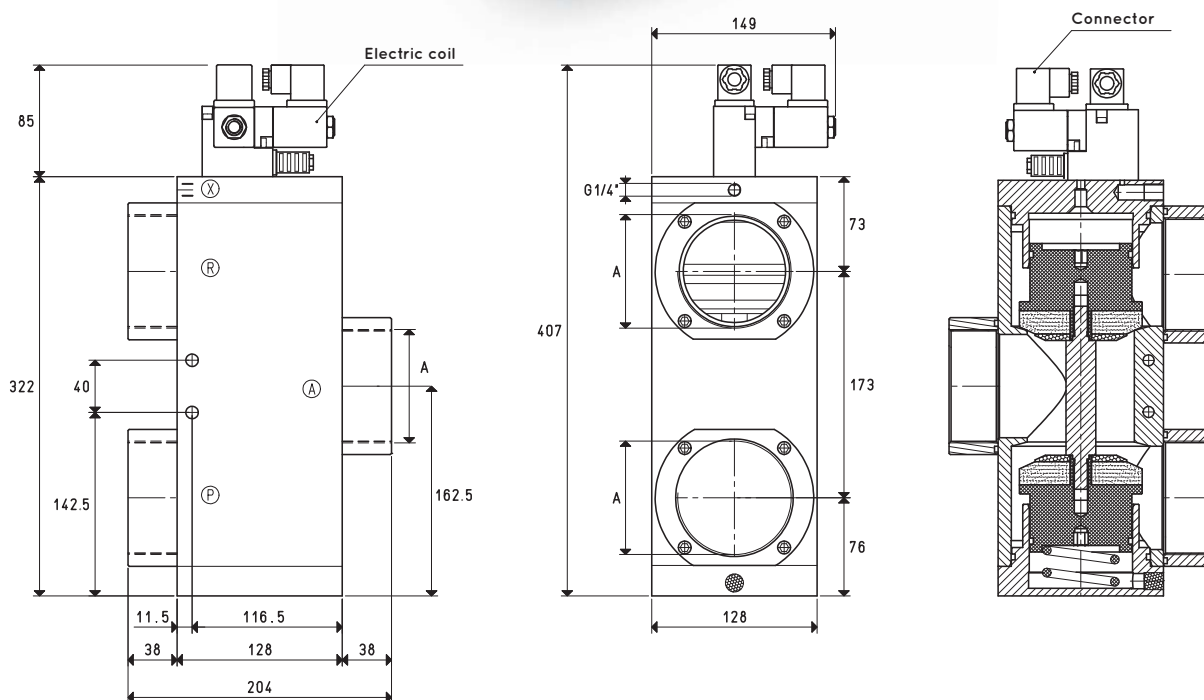

Item	A	Max flow rate	Level of vacuum		Reaction time		Mouth	Cross-section of passage	Pressure at servo-controlled	Weight
	Ø	m³/h	abs. mbar	min	max	msec	Ø	mm²	bar	Kg
						energ. de-energ.				
07 09 51	G3"	750	1000	0.5		132 84	80	5024	4 ÷ 8	11.8

Note: The coil and the connector are not integral parts of the solenoid valve and, therefore, must be ordered separately (See accessories for solenoid valves).

Solenoid valve servo-controlled power must be supplied with non-lubricated compressed air, 5 micron filtration, according to standard ISO 8573-1 class 4.