



SPECIAL BELLOWS CUPS WITH SUPPORTS

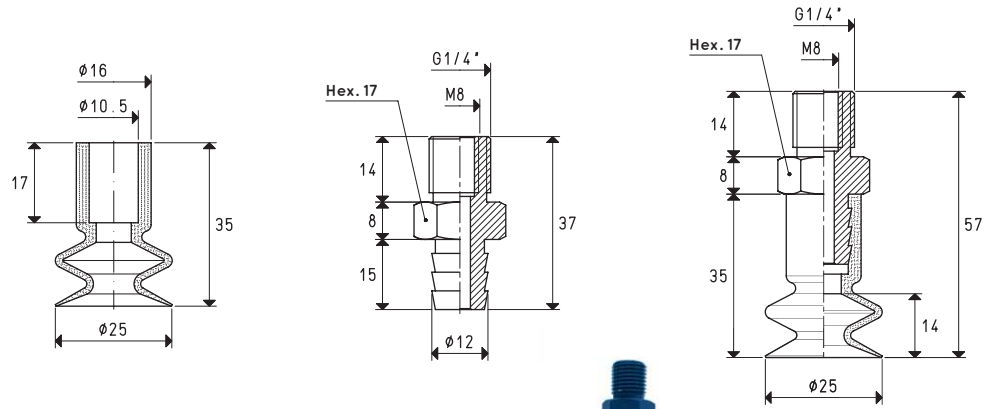


Vacuum cup item	Force Kg	Bellows stroke mm	Volume cm ³	Support item	Support material	Weight g	Vacuum cup with support item	Weight g
01 25 35 *	1.23	10	2.5	00 08 15	aluminium	12.3	08 25 35 *	17.3

* Complete the code indicating the compound: A= oil-resistant rubber; N= natural para rubber; S= silicon

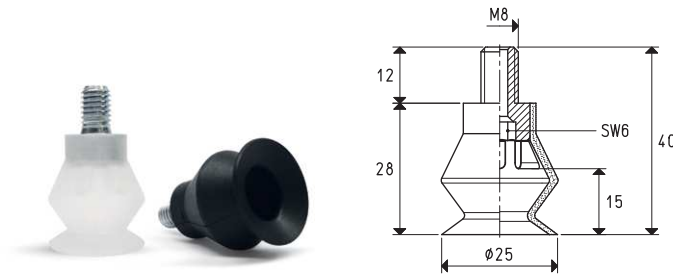

Vacuum cup with vulcanised support Item	Force Kg	Bellows stroke mm	Volume cm ³	Support material	Weight g
08 25 40 *	1.23	9	4.1	steel	13.0

* Complete the code indicating the compound: A= oil-resistant rubber; N= natural para rubber; S= silicon

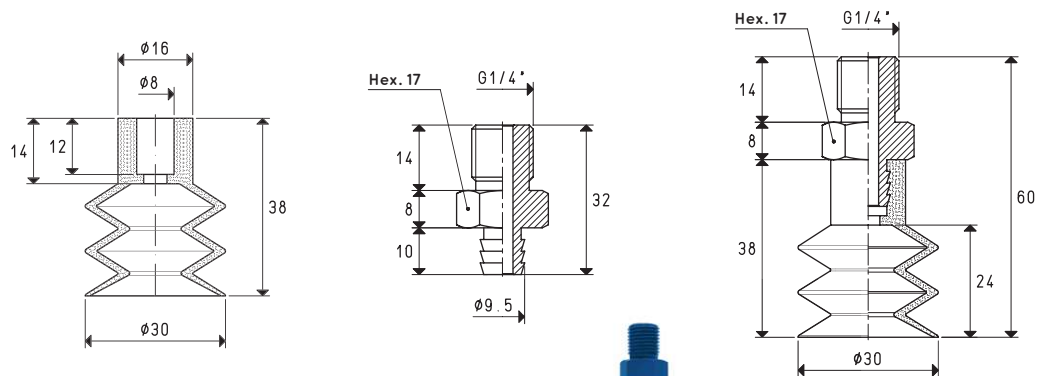

Vacuum cup item	Force Kg	Bellows stroke mm	Volume cm ³	Support item	Support material	Weight g	Vacuum cup with support item	Weight g
01 30 50 *	1.76	14	6.5	00 08 18	aluminium	10.3	08 30 50 *	17.9

* Complete the code indicating the compound: A= oil-resistant rubber; N= natural para rubber; S= silicon

Note: The force of the vacuum cups indicated in the table represents 1/3 of the value of the theoretical force calculated at a level of vacuum of -75 KPa and a factor of safety 3.

Transformation ratio: N (newton) = Kg x 9.81 (force of gravity)

inch = $\frac{\text{mm}}{25.4}$; pounds = $\frac{\text{g}}{453.6} = \frac{\text{Kg}}{0.4536}$

Adapters for GAS - NPT threading available on page 1.130