


## SELF-LOCKING VACUUM CUPS WITH TRACTION RELEASE

These cups do not require a connection to any vacuum source, since the object onto which they are laid on evacuates the air inside them. A built-in non-return valve prevents the air from entering again, thus maintaining the vacuum.

To release the piece, simply lift it a few millimetres, thus opening the non-return valve, which restores the atmospheric pressure inside the cup, by letting the air in.

Since possible losses cannot be recovered, these cups are recommended only for holding objects with smooth and impermeable surfaces, such as glass, polished sheets, and other similar objects. They are particularly suited for glass carrying trolleys feeding trolleys for robotic systems.


They are made with nickel-plated brass with a steel drive bush, which can be provided in the anti-rotation version upon request.

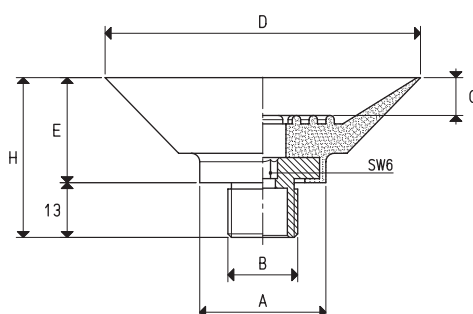

VACUUM CUPS WITH FEMALE VULCANISED SUPPORT, SPARE PART

Item	Force Kg	Volume cm <sup>3</sup>	A Ø	B Ø	D Ø	E	G	H	Support material	Weight g
08 50 40 *	4.90	9.8	31	G3/8"	50	16.0	6.5	29.0	acciaio	38.5
08 75 40 *	11.04	27.8	31	G3/8"	75	25.0	9.0	38.0	acciaio	57.9
08 100 40 *	19.62	41.3	32	G3/8"	100	26.0	9.0	39.0	acciaio	78.3
08 100 50 *	19.62	70.3	32	G3/8"	100	30.5	15.0	43.5	acciaio	74.8

\* Complete the code indicating the compound: B= BENZ rubber; N= natural para rubber; S = silicon

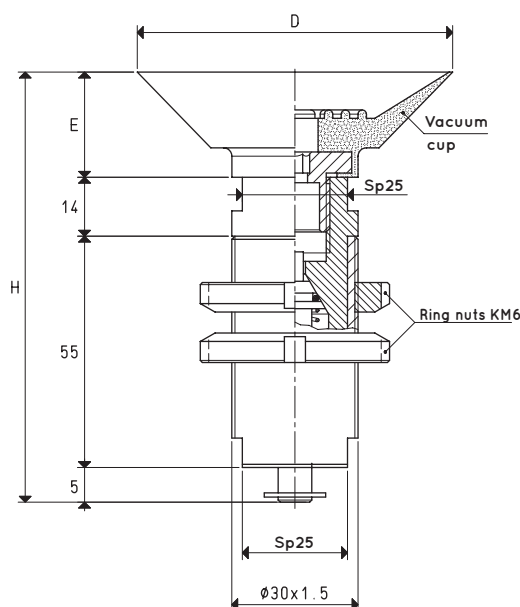

SELF-LOCKING VACUUM CUPS WITH TRACTION RELEASE

Item	Force Kg	D Ø	E	H	Vacuum cup item	Weight g
17 50 40 *	4.90	50	16	90	08 50 40	436
17 75 40 *	11.04	75	25	99	08 75 40	458
17 100 40 *	19.62	100	26	100	08 100 40	474
17 100 50 *	19.62	100	30	104	08 100 50	473

\* Complete the code indicating the compound: B= BENZ rubber; N= natural para rubber; S = silicon

Note: The force of the vacuum cups indicated in the table represents 1/3 of the value of the theoretical force calculated at a level of vacuum of -75 KPa and a factor of safety 3.

Transformation ratio: N (newton) = Kg x 9.81 (force of gravity)      inch =  $\frac{\text{mm}}{25.4}$  ; pounds =  $\frac{\text{g}}{453.6} = \frac{\text{Kg}}{0.4536}$